



# Autocollimators 6B-LED/6D-LED



# Autocollimators 6B-LED/6D-LED

Autocollimator is an easy-to-use but precise metrology instrument for angularity, parallelism, perpendicularity, straightness of precision components, machine guide-way and many other applications.

Nikon Autocollimator 6B-LED and 6D-LED both employ 70 mm aperture lenses to produce clear reflected images. They also feature extremely accurate double line reticles for improved detection. Both give readings of angular displacement to 0.5 seconds of arc using an easy-to-read large-diameter micrometer drum.

Model 6B-LED is a bright viewfield type, while 6D-LED is a dark viewfield type.



## Features

- Efficient measurement because the autocollimator needs only the setting of a target mirror and collects reflected light rays.
- Vertical and horizontal axis values can be measured simultaneously.


## Specifications

Telescope magnification	38 x
Objective	f= 700 mm; effective aperture: 70 mm
Measuring range	30 minutes of arc (both vertical and horizontal axes)
Minimum reading	0.5 seconds of arc
Readout system	Adjustment in viewfield and reading on micrometer
Measuring accuracy	0.5 seconds of arc within a range of 5 minutes of arc 1 second of arc within a range of 30 minutes of arc
Viewfield	6B-LED: bright-field, 6D-LED: dark-field
Light source	LED
Power supply	12V 5A (AC adapter is required) or size AA battery x2
Dimensions of main body	Outer diameter of lens barrel support: 68 mm Overall length: Approx. 490 mm
Weight (including stand)	Approx. 32 kg


\*Batteries are unchargeable with this system.

## Dimensions

Unit: mm

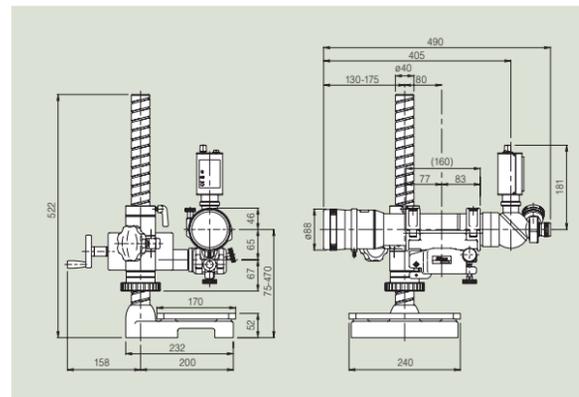

Viewfield diagram (6B-LED) Viewfield diagram (6D-LED)

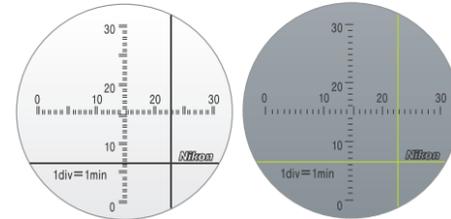

## Bright & dark viewfield

The Autocollimator 6B-LED is a bright viewfield instrument in which a black crosshair image is visible on a bright viewfield, while the Autocollimator 6D-LED is a dark viewfield instrument in which a bright crosshair image is visible on a dark viewfield. Autocollimator 6B-LED is very effective when measuring with a small plane mirror or a low-reflective plane surface.



## LED illuminator

The Autocollimator 6B-LED and 6D-LED can operate on two AA batteries. This new function enables the instruments used in the environment where AC power is not available.



## Measuring the radius of curvature for convex and concave surfaces

The light rays can be made to diverge or converge by turning the objective correction ring. This function allows measurement of the radius of curvature for convex and concave surfaces.

## Accessories



**Case for Autocollimator**  
Aluminum storage case for Autocollimator 6D/6B and 6D-LED/6B-LED.



**LED Illuminator AC-L1**  
LED illumination unit for retrofitting onto Autocollimator 6B/6D illumination unit.

- Power source: AA batteries x2, AC adaptor



## Plane Mirror B

Large extremely accurate reflecting mirror. Since both front and rear surfaces are reflective, the measuring distance can be doubled. A permanent magnet makes it very effective for measuring the squareness and straightness of iron materials.

- Effective aperture of reflecting surface (both sides): 70 mm
- Distance between legs of mirror stand: 100 mm
- Permanent magnet: removable, provided with on/off knob
- Wooden case provided



## Plane Mirror D

General-purpose plane mirror. Base and both sides of the stand serve as guides for measuring straightness and flatness. The mirror can also be removed from the stand and placed on the surface to be measured.

- Effective aperture of reflecting surface: 42 mm
- Distance between legs of mirror stand: 100 mm
- Wooden case provided



## Plane Mirror C

Both sides are perfectly parallel, permitting its use as a reference for non-reflective surface. Also useful for measuring extremely small angles where a smaller mirror is desirable.

- Outer diameter: 30 mm
- Thickness: 12 mm
- Parallelism: 2 seconds of arc
- Wooden case provided



## Pentaprism

Turns the optical axis of the autocollimator exactly 90° for use as an optical square to measure the squareness of two surfaces.

- Guaranteed accuracy (optical right angle): 2 seconds of arc
- Dimensions: 65 x 65 x 45 mm
- Metal frame and wooden case provided



## 8-sided Polygon Mirror

Precisely divides 360° into 8 equal parts to check for eccentricity and errors in goniometers and other angle gauges.

- Guaranteed accuracy: 1 second of arc for compensated values
- Outer diameter: 117 mm
- Diameter of center hole: 20 mm
- Thickness: 46 mm
- Wooden case provided




## 12-sided Polygon Mirror


Accurately divides 360° into 12 equal parts to check for eccentricity and errors in goniometers and other angle gauges.

- Guaranteed accuracy: 1 second of arc for compensated values
- Outer diameter: 117 mm
- Diameter of center hole: 20 mm
- Thickness: 46 mm
- Wooden case provided


# Typical Examples of Use




Measure the accuracy of rotary tables or dividing heads using polygon mirrors. The octahedral mirror measures in units of 45°, and the dodecahedral mirror in units of 30°.




Affix the mirror to the specimen and read the angular deflection using the autocollimator. Small vibrations may also be detected in this manner.




Compare the difference between the crosshair images reflected from the surface of the specimen and from a standard surface.




Measure the difference between the crosshair images reflected from the end surface of the work piece and from a standard angle block.



Compare the reading difference between the standard reflecting surface and the surface of the specimen using the Pentaprism.



Attach a plane mirror, either directly or on a stand, to the moving part and read deviation from the reflection.



Compare the readings taken from plane mirror 'a' on surface 'A' to those from plane mirror 'b' on surface 'B' through the Pentaprism.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. September 2012 ©2008/2012 NIKON CORPORATION  
 N.B. Export of the products\* in this catalog is controlled under the Japanese Foreign Exchange and Foreign Trade Law. Appropriate export procedures shall be required in case of export from Japan.  
 \*Products: Hardware and its technical information (including software)

**WARNING** TO ENSURE CORRECT USAGE, READ THE CORRESPONDING MANUALS CAREFULLY BEFORE USING THE EQUIPMENT.



**NIKON CORPORATION**  
 Shin-Yurakucho Bldg., 12-1, Yurakucho 1-chome  
 Chiyoda-ku, Tokyo 100-8331 Japan  
 phone: +81-3-3216-2384 fax: +81-3-3216-2388  
<http://www.nikon.com/instruments/>



ISO 9001 Certified  
 for NIKON CORPORATION  
 Instruments Company



ISO 14001 Certified  
 for NIKON CORPORATION  
 Yokohama Plant

**NIKON METROLOGY, INC.**  
 12701 Grand River Avenue, Brighton, MI 48116 U.S.A.  
 phone: +1-810-220-4360 fax: +1-810-220-4300  
 E-mail: [sales\\_us@nikonmetrology.com](mailto:sales_us@nikonmetrology.com)  
<http://us.nikonmetrology.com/>  
<http://www.nikoninstruments.com/>

**NIKON METROLOGY EUROPE NV**  
 Geldenaaksebaan 329, 3001 Leuven, Belgium  
 phone: +32-16-74-01-00 fax: +32-16-74-01-03  
 Email: [sales\\_europe@nikonmetrology.com](mailto:sales_europe@nikonmetrology.com)  
<http://www.nikonmetrology.com/>

**NIKON INSTRUMENTS (SHANGHAI) CO., LTD.**  
 CHINA phone: +86-21-6841-2050 fax: +86-21-6841-2060  
 (Beijing branch) phone: +86-10-5831-2028 fax: +86-10-5831-2026  
 (Guangzhou branch) phone: +86-20-3882-0550 fax: +86-20-3882-0580

**NIKON SINGAPORE PTE LTD.**  
 SINGAPORE phone: +65-6559-3618 fax: +65-6559-3668  
**NIKON MALAYSIA SDN. BHD.**  
 MALAYSIA phone: +60-3-7809-3688 fax: +60-3-7809-3633  
**NIKON INSTRUMENTS KOREA CO., LTD.**  
 KOREA phone: +82-2-2186-8400 fax: +82-2-555-4415  
**NIKON INDIA PRIVATE LIMITED**  
 INDIA phone: +91-124-4688500 fax: +91-124-4688527  
**NIKON CANADA INC.**  
 CANADA phone: +1-905-602-9676 fax: +1-905-602-9953  
**NIKON INSTRUMENTS S.p.A.**  
 ITALY phone: +39-055-300-96-01 fax: +39-055-30-09-93

**NIKON METROLOGY UK LTD.**  
 UNITED KINGDOM phone: +44-1332-811-349 fax: +44-1332-639-881  
 E-mail: [sales\\_uk@nikonmetrology.com](mailto:sales_uk@nikonmetrology.com)  
**NIKON METROLOGY SARL**  
 FRANCE phone: +33-1-60-86-09-76 fax: +33-1-60-86-57-35  
 E-mail: [sales\\_france@nikonmetrology.com](mailto:sales_france@nikonmetrology.com)  
**NIKON METROLOGY GMBH**  
 GERMANY phone: +49-6023-91733-0 fax: +49-6023-91733-229  
 E-mail: [sales\\_germany@nikonmetrology.com](mailto:sales_germany@nikonmetrology.com)